

Data Report

File Information
 File Created Date: 08/28/19 11:24:20

Device Information
 Device Type: Tempnote TH32
 ID: 31100000000000000000
 Start Delay: 30 min
 Description: Temp Recorder

Logging Summary
 First Point: 08/28/19 08:45:04
 Stop Time: 09/03/19 11:20:04
 Number of Points: 693
 Trip Length: 068 04h 42m 00s
 Stop Mode: Manual Stop

Alarm Condition
 First Point Time: 08/28/19 08:45:04
 OK: 08/28/19 08:45:04
 Alarm: 08/28/19 08:45:04



Tempnote








- Auto Generated PDF & CSV Reports
- Integrated USB
- Replaceable Battery
- User Programmable
- Validation Certificate Included


Tempnote® TH32

Multi Use Temperature and Humidity Data Logger

Economical Reusable Temperature & Humidity Data Logger for Cold Chain Monitoring

Tempnote® TH32 dataloggers are extremely engineered for cold chain monitoring during storage or transit. Tempnote® TH32 is integrated with USB & Plug-N-Play features for auto-generating secured PDF report without requiring additional Hardware (cable/interface) or software. Tempnote® TH32 dataloggers are equipped with highly precise sensor with accuracy of $\pm 0.5^{\circ}\text{C}$ for entire range of -30°C to $+60^{\circ}\text{C}$ and $\pm 3\%$ rH. Manufacturer's NIST traceable Certificate of Validation is included to comply with Quality Assurance needs.

- | | |
|---|---|
|  <p>PDF & CSV REPORT
 Automatically generated encrypted PDF & CSV format report, no software required to access data file.</p> |  <p>VALIDATION CERTIFICATE
 Manufacturer's Validation Certificate included for proven accuracy and to comply with regulations</p> |
|  <p>EN 12830 COMPLIANT
 Compliant with European standards to meet the demands of the transportation industries</p> |  <p>INTUITIVE LCD INDICATION
 LCD shows vital information including statistics, alarm and running status, remaining battery</p> |
|  <p>USB CONNECTION
 Integrated USB for most conveniently download data report without additional interface or cable.</p> |  <p>IP65 RATING
 Highest Protective design ensures continuous data logging even in complex environmental conditions.</p> |

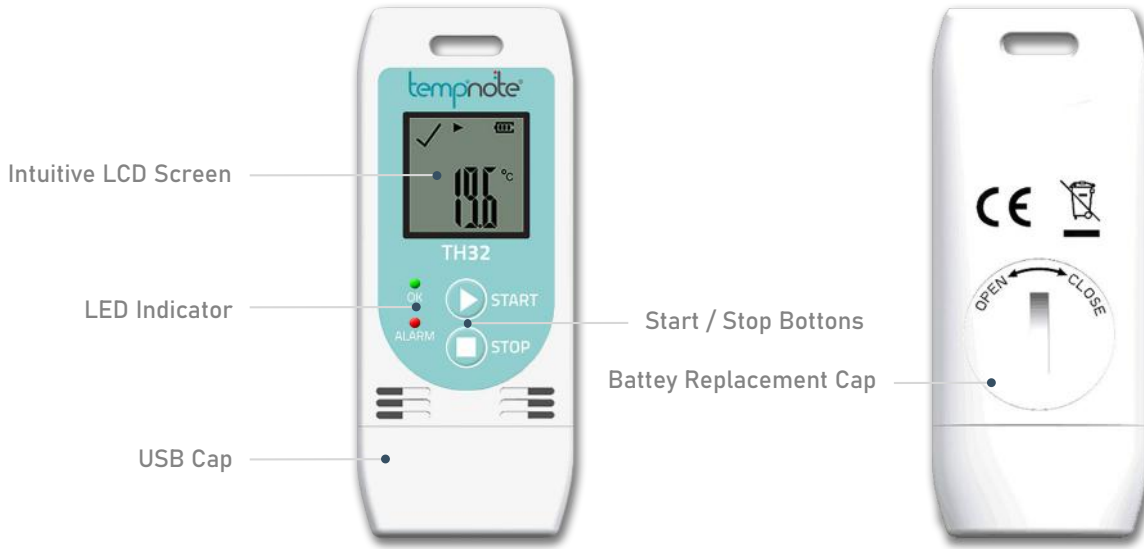


Technical Specifications

Type	Re Usable / Multiple Use	Protection Class	IP65
Measurement Range	-30°C to +60°C	Dimension	89 mm x 36 mm x 16 mm
Accuracy	± 0.5 °C (-30°C to +60°C)	Weight	Approx 30 Gms
Humidity Range	0% to 100% rH	Certifications	EN12830, CE
Humidity Accuracy	3% rH	Validation Certificate	Hard Copy Included
Memory Capacity	32,000 Values	Report	Self Generated PDF + CSV
Recording Interval	10 sec to 18 Hrs (Customizable)	Alarm Range	High & Low Alarm
Battery Type	3V / Replaceable CR2032	Connectivity	USB 2.0



Application

Sea Freight & Air Freight



Distribution & Last Mile Delivery



Storage & Freezer Monitoring



Clean Rooms | Pharma | Hospital | HVAC | BulkDrugs | Chemicals | Heavy Machinery | Hydraulics | Vacuum Industry
 Green House | Server Room | Confined Space | Cold Storage

Instrukart Holdings

India Toll Free : 18000-121-0506 | Ph : +91 (40)40262020
 Mob +91 7331110506 | Email : info@instrukart.com
 #18, Street-1A, Czech Colony, Sanath Nagar, Hyderabad -500018, INDIA.