

# Multi-purpose infrared and penetration thermometer

## testo 104-IR – Multi-scanning with penetration control

---

Ideal for applications in the food sector

---

One product, two purposes: Infrared and penetration thermometer

---

Fits into any pocket thanks to folding mechanism

---

High-quality, robust folding joint for tough working use

---

Precise 2-point laser with 10:1 optics shows the exact measurement area, allowing error-free measurements

---

Emissivity freely selectable

---

Watertight (IP65) and HACCP-compliant

---




The testo 104-IR is a waterproof (IP65) penetration thermometer combined with an infrared sensor for non-contact temperature measurement. It can be used for all sorts of applications in the food sector. The testo 104-IR scans the surface temperature of individual foods or entire goods pallets without contact, particularly in the Incoming Goods department. If a limit value is exceeded or undershot, the hinged penetration probe is also able to measure the core temperature.

The multi-purpose instrument is handy and practical, because it fits into any jacket pocket. The penetration probe

is always securely stowed on the instrument itself. As soon as the probe is opened up, the display is activated. And the IR measurement starts at the touch of a button. Thanks to the large display, it is really easy to read the measurement result.

The few buttons are self-explanatory and any user will find it easy to operate them. No time-consuming measurements, no complicated handling, no compromises. Supply consumers with exclusively flawless goods using the testo 104-IR.

## Technical data

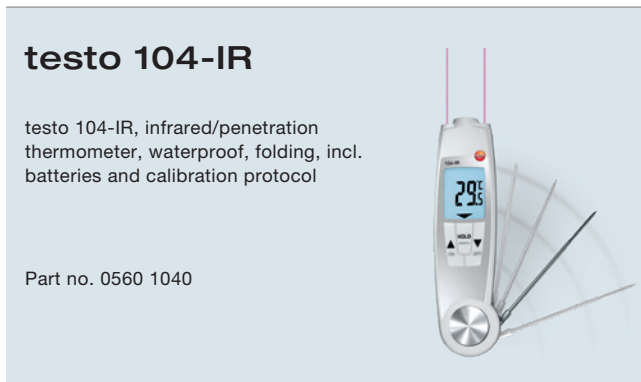

Sensor type	NTC
Measuring range	-50 to +250 °C
Accuracy ±1 digit	±1 °C (-50.0 to -30.1 °C) ±0.5 °C (-30.0 to +99.9 °C) ±1% of m.v. (+100 to +250 °C)
Resolution	0.1 °C/°F/°R
Response time	t <sub>99</sub> = 10 s (measured in moving liquid)

Sensor type	Infrared
Measuring range	-30 to +250 °C
Accuracy ±1 digit	±2.5 °C (-30.0 to -20.1 °C) ±2.0 °C (-20.0 to -0.1 °C) ±1.5 °C or ±1.5% of m.v. (remaining range)
Resolution	0.1 °C
Measurement rate	0.5 s
Optics	10:1 + opening diameter of the sensor (12 mm)
Meas. spot marking	2 point laser
Spectral range	8 to 14 µm
Emissivity	0.10 to 1.00 (0.01 steps)
Laser marking	on / off

## Accessories

	Part no.
ISO calibration certificate/temperature for air/immersion probes, calibration point -18°C	0520 0061
ISO calibration certificate/temperature for air/immersion probes, calibration point 0°C	0520 0062
ISO calibration certificate/temperature For air/immersion probes, calibration points -18°C; +60°C	0520 0043
ISO calibration certificate/temperature for air/immersion probes, calibration points -18°C; 0°C; +60°C	0520 0001
ISO calibration certificate/temperature infrared thermometers, calibration points -18°C, 0°C, +60°C	0520 0401
ISO calibration certificate temperature Infrared thermometers, calibration points 0°C, +60°C	0520 0452

### General technical data

Measurement value	temperature °C/°F/°R
Measurement mode	Hold or auto hold (immersion probe)
Operating temperature	-20 to +50 °C
Storage temperature	-30 to +70 °C
Battery type	2 AAA micro batteries
Battery life	10 h (at +25 °C)
Display	LCD, single line, illuminated, with status line (°C, °F, °R, battery, hold/auto hold, min, max, laser, measurement, emissivity)
Protection class	IP65
Dimensions	281 x 48 x 21 mm (probe folded out) 178 x 48 x 21 mm (probe not folded out)
Probe length/diameter	106 mm / Ø 3 mm
Probe tip diameter	32 mm / Ø 2.3 mm
Housing material	ABS / TPE / PC, diecast zinc, stainless steel
Weight	197 g (incl. batteries)
Standard	EN 13485

Clean Rooms | Pharma | Hospital | HVAC | BulkDrugs | Chemicals | Heavy Machinery  
Hydraulics & Vacuum Industry | Green House | Server Room | Confined Space | Cold Storage

## Instrukart Holdings

India Toll Free : 1800-121-0506 | Ph : +91 (40)40262020

Mob +91 7331110506 | Email : info@instrukart.com

#18, Street-1A, Czech Colony, Sanath Nagar, Hyderabad -500018, INDIA.