


# SIGNAL ISOLATOR

Model: PMMM-S2

Introducing a compact DIN rail mount isolator with a rugged design. This 4-wire isolator ensures accurate signal isolation and offers a 1.5 KV AC three-port isolation. With high output load driving capability, it can handle demanding loads. a versatile and reliable solution for industrial applications.

Input  
4-20mA DC

Output 1,2  
4-20mA DC

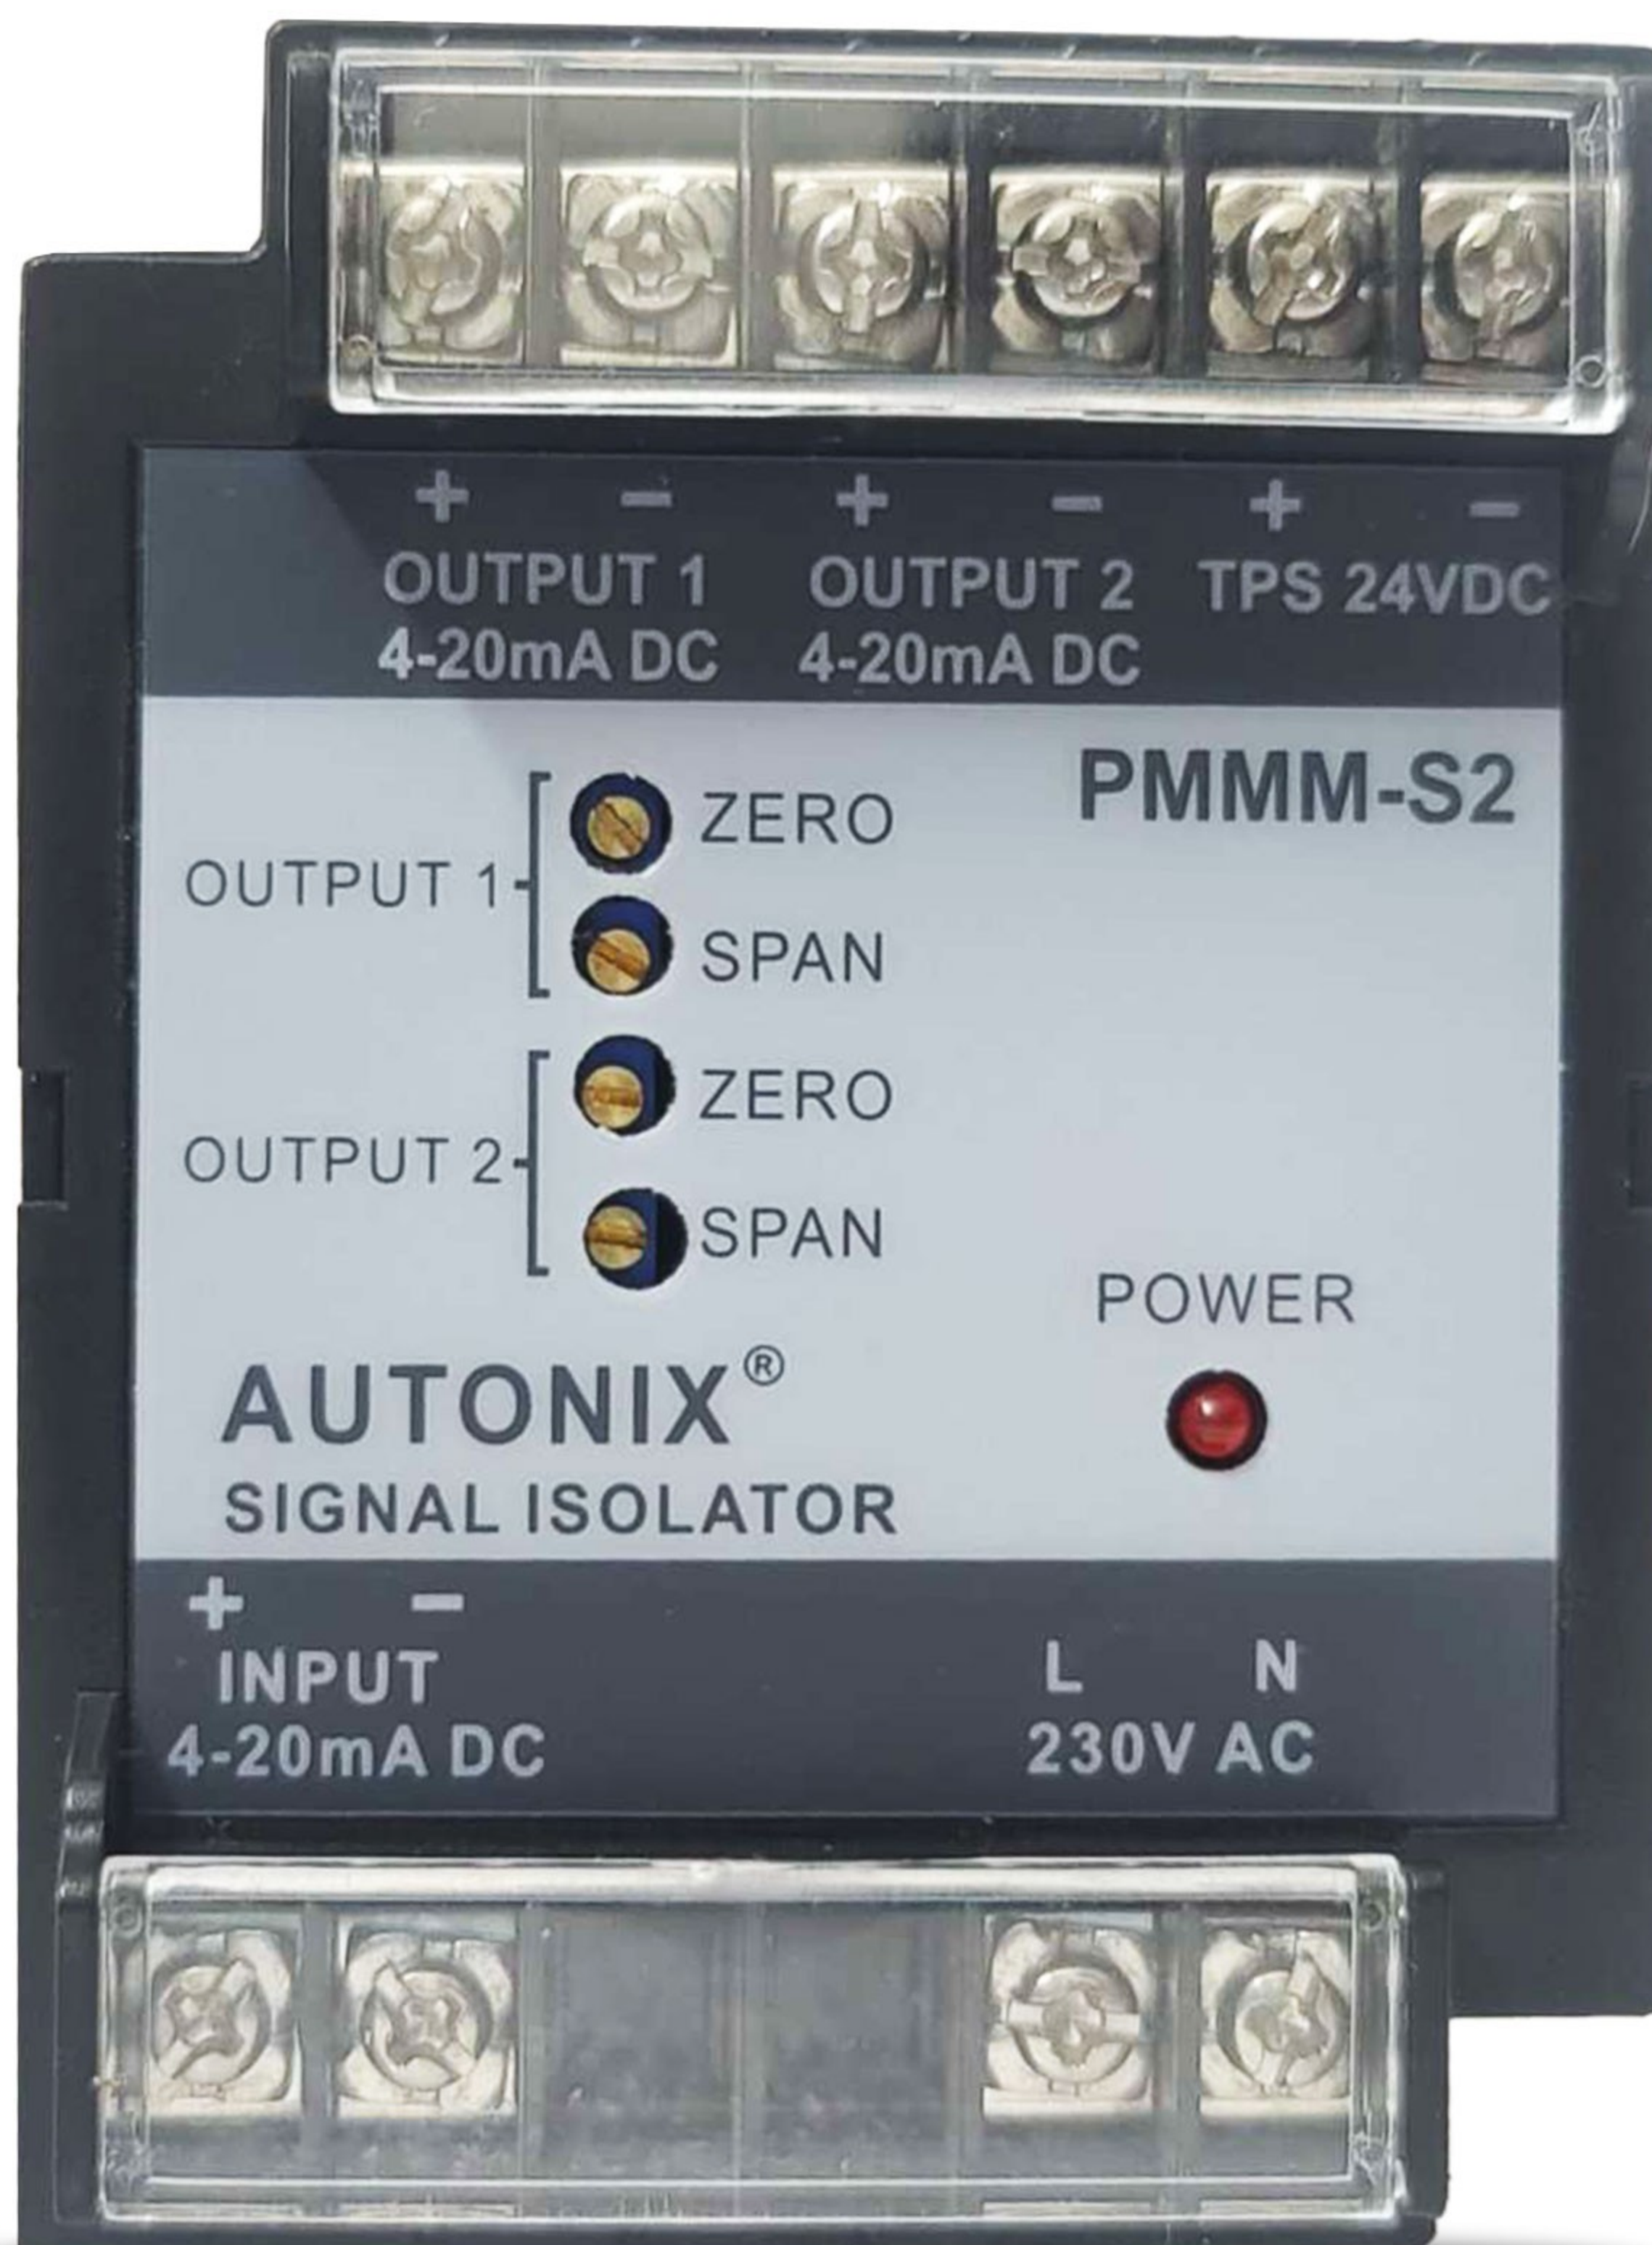

- Compact DIN rail mount Design
- Rugged & accurate 4 wire isolator
- 1.5 KV AC three port isolator
- High output load driving capability

# Specifications

Model	PMMM-S2
Auxiliary Supply	230VAC
Input Type	mA
Input Range	4~20mA DC
Output type	mA
Output Range	Output 1,2: 4~20mA DC
Transmitter power supply	24VDC,25mA
No load current	max 10mA at 12VDC
Housing material	ABS
Indicator	Power indicator LED(Red)
Operating temperature	-0 to +55°C (non-freezing condition)
Storage temperature	-10 to +60°C (non-freezing condition)
Ambient humidity	35 to 95%RH
Weight	Approx 400gms

## Other Models

